

## DT Series




### Features

- Compact size, high performance, low cost
- With Large current loads
- Toroidal shape core reduces coils roar to an all-time low

### Applications


- Compact size, high performance, low cost
- With Large current loads
- Toroidal shape core reduces coils roar to an all-time low

### Product Identification

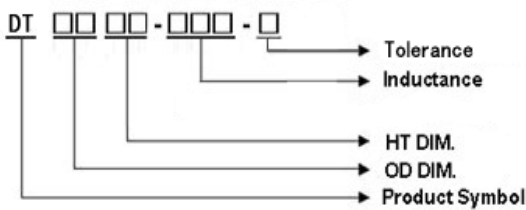

- Note: lead-free
- Customized specifications are also welcome.

### Shapes and Dimensions



### Electrical Specifications

Part Number	Dimensions (mm)					Turns	Inductance (μH)Typ	RDC (Ω) Typ
	A Max	B Max	C Max	D Max	Wire Dia			
DT1005 -330 -M	12.0	7.0	25.0	3.0	0.4 φ	25	33	59
DT1104 -300 -M	13.5	7.5	25.0	3.0	0.4 φ	25	30	62
DT1305 -330 -M	15.5	8.5	25.0	3.0	0.4 φ	28	33	71
DT1306 -300 -M	17.0	9.5	25.0	3.0	0.6 φ	26	30	30
DT1506 -330 -M	19.0	10.0	25.0	3.0	0.6 φ	24	33	40
DT1806 -390 -M	21.0	10.0	25.0	3.0	0.6 φ	25	39	33
DT2006 -430 -M	25.0	11.0	25.0	3.0	0.8 φ	29	43	31
DT2310 -960 -M	27.0	13.5	25.0	3.0	0.8 φ	30	96	42
DT2711 -121 -M	32.0	17.0	25.0	3.0	1.0 φ	30	120	37
DT3311 -141 -M	40.0	17.0	25.0	3.0	1.0 φ	40	140	37

Test instrument:

- L: HP4263B DIGITAL LCR METER
- RDC: CHEN HWA502BC